• ATELIER produced & distributed by Fortuny S.r.l. San Marco, 2425 . 30124 Venezia - Italy p+39 041 5236953 . info@fortuny.it www.fortuny.it CESENDELLO / art. G 019 CE-2 / glass assembly instructions / wall 1 x MAX 5W | E14 | 220-240V | 50-60 Hz (€ ATTENTION: do not use abrasive products to clean this lamp but only a damp cloth. Our creations may show slight imperfections due to the special handwork required on each piece. IMPORTANT: keep for any possible need

Variations are one of the features which make each of our products an original and unique item.

GENERAL:

- Read all instructions and review diagrams beginning with the installation of the fixture.
- All electrical connections must be in accordance with local codes, ordinances or national codes. If you are unfamiliar with methods of electrical wiring, secure the services of a qualified licensed electrician.

BEFORE BEGINNING INSTALLATION:

- Turn off the electricity to the outlet box at the circuit breaker or fuse box.
- If you are replacing an existing fixture, remove the old fixture and expose the supply wiring.
- Remove the old cross bar.


ELECTRICAL CONNECTIONS:

- Connect the blue wire from the fixture to the blue wire of the supply circuit.
- Connect the brown wire from the fixture to the brown supply wire. Connect the ground wire - yellow/green to the ground conductor of the supply circuit.
 Make sure that there are no loose strands of wire and that there are no loose connections.


INSTALLING FIXTURE:


- 1. Before starting the installation, disconnect the power.
- 2. Make the electrical connections. Refer to the section titled Electrical Connections.
- 3. Place the bracket (element **B**) of the wall sconce over the screw **C** and secure against the mounting surface as shown.


Please make sure that the bracket **B** is in the right position as shown in the fig. 2.

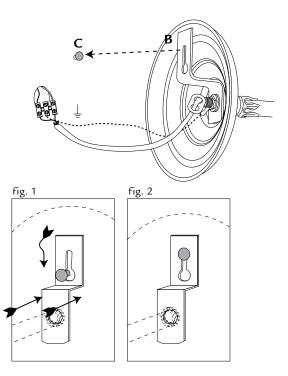

- Install bulb. Do not exceed the maximum wattage for this fixture. Refer to the wattage warning label attached to the fixture for maximum allowable wattage.
- 6. You can now hang your lampshade.
- 7. Restore the electricity and test.

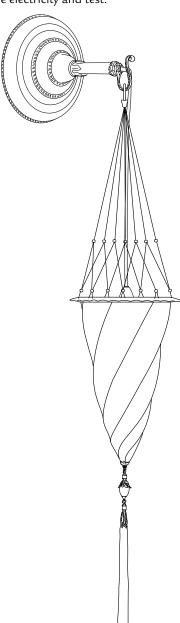

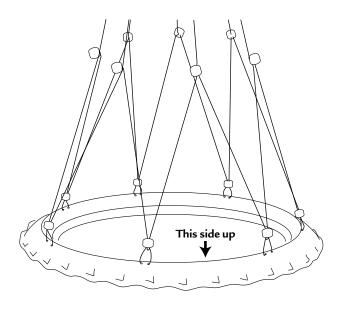




B. Insert the lampshade through the cords as shown in the picture.

C. Delicately push lampshade down until is firmly secured to the frame.

Α

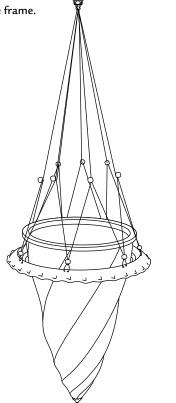

D. Please note: if the length of the cords is minimal you will find the chains dropped from the frame (as shown in the pictures).

