www.fortuny.it SCUDO SARACENO / art. G 125 SGC-2 / glass assembly instructions / semiflush 3 x MAX 15W E27 220-240V 50-60 Hz (€ ATTENTION: do not use abrasive products to clean this lamp but only a damp cloth. Our creations may show slight imperfections due to the special handwork required on each piece. IMPORTANT: keep for any possible need Variations are one of the features which make each of our products an original and unique item.

• ATELIER

FORTVNY VENEZIA .

GENERAL:

- Read all instructions and review diagrams beginning with the installation of the fixture.
- All electrical connections must be in accordance with local codes, ordinances or national codes. If you are unfamiliar with methods of electrical wiring, secure the services of a qualified licensed electrician.

BEFORE BEGINNING INSTALLATION:


- Turn off the electricity to the outlet box at the circuit breaker or fuse box.
- If you are replacing an existing fixture, remove the old fixture and expose the supply wiring.
- Remove the old cross bar.


ELECTRICAL CONNECTIONS:


- Connect the blue wire from the fixture to the blue wire of the supply circuit.
- Connect the brown wire from the fixture to the brown supply wire. Connect the ground wire - yellow/green to the ground conductor of the supply circuit.
 Make sure that there are no loose strands of wire and that there are no loose connections.


- 1. Place the template to the ceiling and mark the 5 external spots + the 2 central ones.
- 2. Remove the template and pierce the marked spots.


 Insert the plugs **A** in the 5 external holes and screw to fix.
- 3. Fix the bracket **B** to the ceiling.
- 4. Make electrical connections.
- 5. Fix the ceiling attachment by means of the screw **C**.
- 6. Screw the 5 light bulbs.
















7 - Lay the metal ring over the polystyrene **D**.

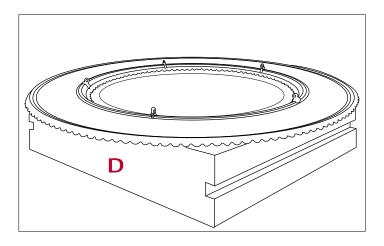

9/10 - Fix the 5 pins **E** by means of the screws **F** (these should be in a plastic bag inside the box).



- 11 2/3 persons should now raise the entire lamp (metal ring and glass shade).Insert the hook of the chain A in the 5 pin holes.
- 12 Suspend the tassel.

 The lamp is completely mounted.

 Restore the electricity and test.

